


## VertX™ V200 Input Monitor Sub-Controller

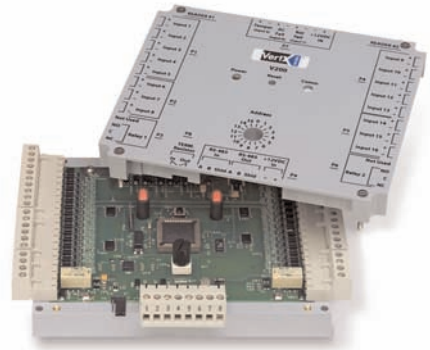

### Overview

---

The HID VertX products provide a complete and fully featured hardware/firmware infrastructure for access control software host systems. The V200 Input Monitor Sub-Controller connects up to 16 supervised input circuits. Each input point monitors and reports normal, off-normal, and alarm states. The V200 features on-board flash memory, allowing program updates to be downloaded through the network. The V200 connects to the V1000 via a high speed RS-485 network. The V1000, in turn, communicates with the system host via industry standard TCP/IP protocol, over 10/100 Mbps Ethernet, or the Internet. This architecture minimizes the impact on corporate LANs, by using only one TCP/IP address for every 32 sub-controllers and by handling low-level transactions on the RS-485 network.

### Features

---

- Reports supervised or un-supervised alarm circuits.
- Off-normal condition programmable for each input point (NO or NC alarm devices may be used).
- Connects to the V1000 via RS-485.
- Receives and processes real time commands from the V1000.
- Reports all activity to the V1000.
- Allows complex input/output linking when used with the V1000 and V300.
- Attractive polycarbonate enclosure protects components from damage.
- All connections and indicators are fully identified by silk-screened nomenclature on the cover.
- UL 294 and UL 1076 recognized components.

#### Visual Indicators

Communications LED flashes green for “transmit to host” and red for “receive from host.” Power LED indicates that sufficient DC voltage is being provided to the unit.

## VertX™ V200 Input Monitor Sub-Controller

### Features

---

#### Easily Interfaced

- Quick-disconnect screw terminal connectors
- Rotary address switch (0-15)
- Inputs for:
  - 16 input circuits
  - AC Fail Monitor\*
  - Battery Fail Monitor\*
  - Enclosure Tamper\*

\*Can be configured as a general purpose input

#### Non-latching relay outputs

(rated 2A @ 30 VDC):

- 2 auxiliary devices: alarm host offline (comms down), or general purpose

#### Local Processing

- Basic input/output linking using inputs 1 and 2, and auxiliary outputs 1 and 2

### Specifications

---

#### Dimensions

5.8" W x 4.825" H x 1.275" D  
(147.32 mm x 122.55 mm x 32.38 mm)

**Weight:** 12.4 oz (.35 kg)

**Enclosure Material:** UL94 Polycarbonate

#### Power Supply Requirements

50 mA @ 9-18 VDC

Recommended: Supervised linear power supply with battery back-up, input surge protection, and AC fail and battery low contact outputs.

Separate supervised DC supply with battery back-up recommended for relay activated devices.

#### Operating Environment

Indoors, or customer-supplied NEMA-4 rated enclosure

#### Temperature

32° to 122° F (0° to 50° C)

#### Humidity

5% to 95% relative, non-condensing

#### Communication Ports

RS-485 - two wire.

#### Input Circuit Supervision

Configurable for EO resistor values of 1K through 10K. Can also be configured for use as unsupervised circuits.

#### Certifications

UL 294 and UL 1076 Recognized Component for the US

CSA 205 for Canada

FCC Class A Verification

EMC for Canada, EU (CE Mark), Australia

(C-Tick Mark), New Zealand, Japan

EN 50130-4 Access Control Systems

Immunity for the EU (CE Mark)

#### Cable Distance

**RS-485 – 4000 feet (1220 m)** to host, using Belden 3105A, 22AWG twisted pair, shielded 100Ω cable

**Input Circuits** – 500 feet (150 m), two-conductor, shielded, using ALPHA 1292C (22AWG) or Alpha 2421C (18AWG)

**Output Circuits** – 500 feet (150 m), 2-conductor, using ALPHA 1172C (22AWG) or Alpha 1897C (18AWG)

Minimum wire gauge depends on cable length and current requirements.

